


Specifications:
 Rated Voltage : 250V AC/DC
 Rated Current : 3A AC,DC
 Withstand Voltage : 1000V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements



12003H00-2xNPA-HF

① ② ③ ④ ⑤

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ A : Product color(A--Y)
Blank : Natural type
- ⑤ HF : Halogen Free

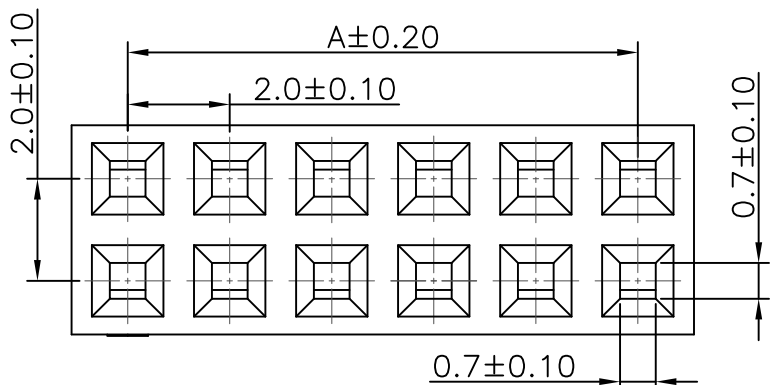

| Dimensional Ordering Information: | | 2x12P | 22.00 | 24.20 | |
|-----------------------------------|------------|-------|-------|-------|-------|
| | | 2x13P | 24.00 | 26.20 | |
| | | 2x14P | 26.00 | 28.20 | |
| Circuits No. | Dimensions | | 2x15P | 28.00 | 30.20 |
| | A | B | | | |
| 2x2P | -- | 4.20 | 2x16P | 30.00 | 32.20 |
| 2x3P | 4.00 | 6.20 | 2x17P | 32.00 | 34.20 |
| 2x4P | 6.00 | 8.20 | 2x18P | 34.00 | 36.20 |
| 2x5P | 8.00 | 10.20 | 2x19P | 36.00 | 38.20 |
| 2x6P | 10.00 | 12.20 | 2x20P | 38.00 | 40.20 |
| 2x7P | 12.00 | 14.20 | 2x21P | 40.00 | 42.20 |
| 2x8P | 14.00 | 16.20 | 2x22P | 42.00 | 44.20 |
| 2x9P | 16.00 | 18.20 | 2x23P | 44.00 | 46.20 |
| 2x10P | 18.00 | 20.20 | 2x24P | 46.00 | 48.20 |
| 2x11P | 20.00 | 22.20 | 2x25P | 48.00 | 50.20 |

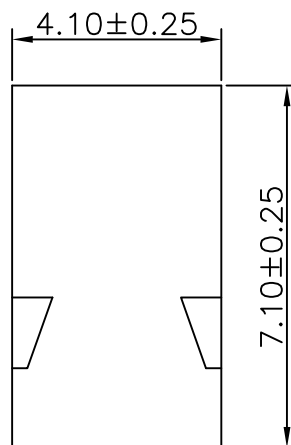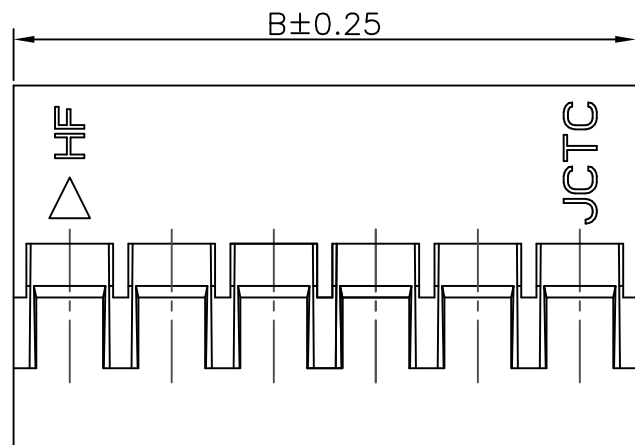

Suitable for JCTC 12003 series terminal

| Part No. | Material | Color |
|-------------------|------------------|-------|
| 12003H00-2xNPA | Nylon 66,UL94V-0 | 黑色 |
| 12003H00-2xNPA-HF | Nylon 66,UL94V-0 | 黑色无卤 |
| 12003H00-2xNPK-HF | Nylon 66,UL94V-0 | 白色无卤 |
| 12003H00-2xNPG-HF | Nylon 66,UL94V-0 | 蓝色无卤 |

| REV. | REVISION RECORD | DATE | UNIT: MM | GENERAL TOLERANCES | | SCALE: 1:1 | NAME | DATE | PART. NO: 12003H00-2xNPX | DWG. NO: ENDE05 | TERMINAL&CONNECTORS |
|------|-----------------|----------|-----------|--------------------|----------|------------|----------|------------------------------------|-----------------------------|--------------------|-------------------------|
| C0 | 新图面发行 | 09.11.25 | | LINEAR | ANGLES | APPROVED | | | | | |
| C1 | 新增白色规格 | 15.01.23 | 0.0±0.25 | X° REF±6° | DESIGNER | | | | | | |
| C2 | 新增蓝色规格 | 15.08.31 | 0.00±0.15 | X° ±3° | DRAWN | 伍文聪 | 20.12.24 | TITLE: DB双排 2.0mm PITCH HOUSING | | | |
| C3 | 变更公司名称 | 20.12.24 | SIZE: A4 | 0.000±0.08 | X° X'±2° | | | REV: C3 | SHEET: 1/1 | | |